



SL Series ø86mm Multi-Stamp Type Rotating Signal Light



Ordering information (표준주문사양)

SL G F 2 110 R

① ② ③ ④ ⑤ ⑥

①	SL	Dome top lens series
②	G	Stud mount
	P	Pole mount
③		Rotating mirror
	F	Flashing light
	K	1 stack 110VAC, 220VAC 2stack 110VAC, 220VAC
④	1	1 Stack
	2	2 Stack
	3	3 Stack
⑤	01	12VDC
	02	24VDC
	10	110VAC
	20	220VAC
⑥	FF	110/220VAC
	R	Red lens
	G	Green lens
	Y	Yellow lens
	B	Blue lens

Features (특징)

- ø 86mm lens diameter
- Rotating, flashing and strobe model
- Stud mounting
- 3 lens colors available
- Various operating voltage
- Incandescent or Xenon bulb


- ø 86mm 투광렌즈 적용
- 반사회전타입, 점구점멸타입
- 편리한 취부고정구
- 37가지 색상의 투광렌즈
- 다양한 전압사양
- 2가지 전압을 동시에 사용(110,220V)
- 장시간 수명의 전구

Specification (전기적사양)

Series	SL		
Model	SLG / SLP	SLGF / SLPF	SLGK / SLPK
Power supply	12VDC, 24VDC, 110/220VAC	12VDC, 24VDC, 110/220V AC	110VAC, 220VAC
Lens type	Smooth type	Prism type	Smooth type
Lens color	Red, Green, Yellow		
Rotation rate	130 / min		130 / min
Flash rate		80 / min	
Internal buzzer	Not available		
Current consumption	1 Stack	12VDC:0.4A / 24VDC:0.3A / 110/220VAC:0.07A	110VAC:0.07A / 220VAC:0.07A
	2 Stack	12VDC:0.8A / 24VDC:0.6A / 110/220VAC:0.14A	110VAC:0.14A / 220VAC:0.14A
	3 Stack	12VDC:1.2A / 24VDC:0.9A / 110/220VAC:0.2A	
Bulb type	Incandescent (전구형)		
Bulb voltage and wattage	12V, 24V, 110V, 220V : 8W		110V/ 220VAC : 12V5W
	110V/ 220V : 12V5W		
Termination	Wire leads		
Stack	1 Stack-3 Stack		1 Stack, 2 Stack

Dimensions (외형치수도)

(UNIT: mm)

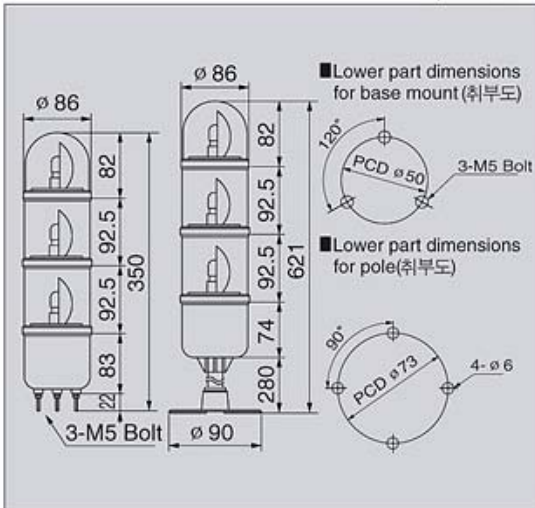

Connections (결선도)

